

KI1257,1258

Slit less Type

Description

Model **KI1257/1258** consists of an Infra Red LED and a Photo IC(Digital Output). Outer package has no aperture on the both light pass surfaces of the emitter and detector.

Feature

- Built-in amplifier, Open collector output type.
- Easy removing in paper-dust.
- Wide gap-5mm.
- High-resolution : slit width 0.5mm.
- Visible Light cut filter.
- Built in resistor for LED drive.
- The other model;
Pull-up Resistor output type ... **KI1255, KI1256**


Application

- Object passing for Card reader, Bill exchanger.
- Coin-passing for Auto vending machine and Amusement.
- Object passing in Auto vender and Ticket vending machine.
- Paper detection for O.A. equipment.


Absolute Maximum Ratings
[Ta=25°C Unless otherwise noted]

Item	Symbol	Rating	Units
Supply Voltage	V _{CC}	6	V
Low Level Output Current	I _{OL}	50	mA
Operating Temperature	T _{opr}	-20 ~ +75	°C
Storage Temperature	T _{stg}	-40 ~ +80	°C

Dimension (Unit:mm)

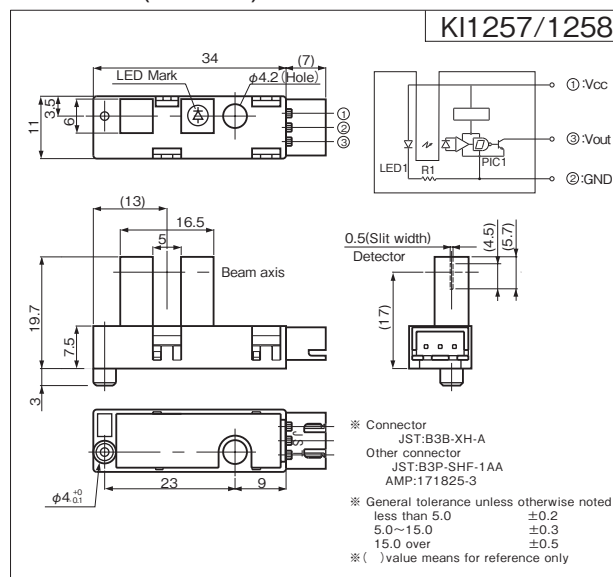

Model	Operating mode
KI1257	at Beam detecting High
KI1258	at Beam detecting Low

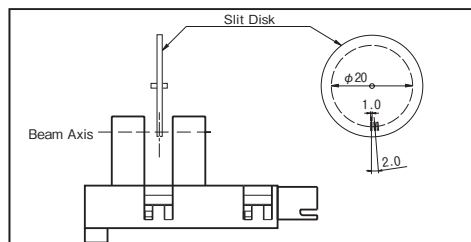

Note: Each value shown at rotating of slit disk.
Don't output as DC.


Electro-Optical Characteristics [V_{CC}=5V, Ta=25°C Unless otherwise noted]

Item	Symbol	Condition	min.	typ.	max.	Units
Supply Voltage	V _{CC}		4.5	5.0	5.5	V
Low Level Supply Current	I _{CC}	KI1257 at Light block by object	—	—	25	mA
		KI1258 at Beam detecting	—	—	25	
High Level Supply Current	I _{CC}	KI1257 at Beam detecting	—	—	25	mA
		KI1258 at Light block by object	—	—	25	
Low Level Output Voltage	V _{OL}	KI1257 at Light block by object, I _{OL} =16mA	—	—	0.4	V
		KI1258 at Beam detecting, I _{OL} =16mA	—	—	0.4	
High Level Output Voltage	V _{OH}	KI1257 at Beam detecting, R _L =47k Ω	V _{CC} × 0.9	—	—	V
		KI1258 at Light block by object, R _L =47k Ω	V _{CC} × 0.9	—	—	
Frequency	f		3000	—	—	Hz
Response Time	Rise		—	1.47	—	μ sec
	Fall		—	0.02	—	


KI1257/1258

Note: Operation never exceeds each value of Absolute Maximum Ratings.


Low-level Output Current vs. Ambient Temperature

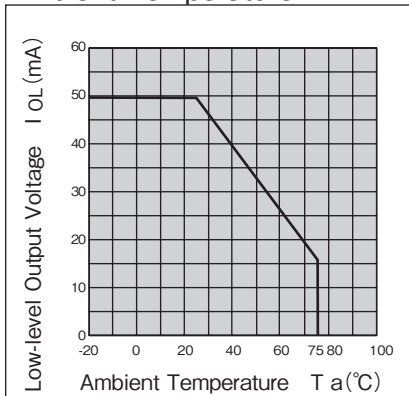


Low-level Output Voltage vs. Low-level Output Current (typ.)

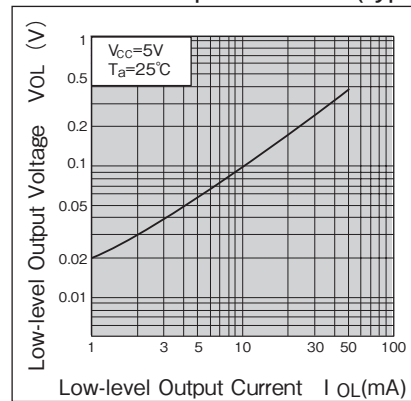


Detecting Position 1 (typ.)
KI1257

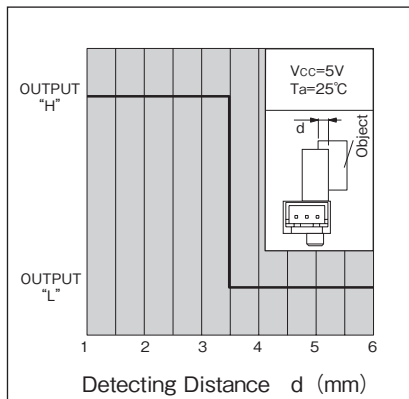


Detecting Position 2 (typ.)
KI1257

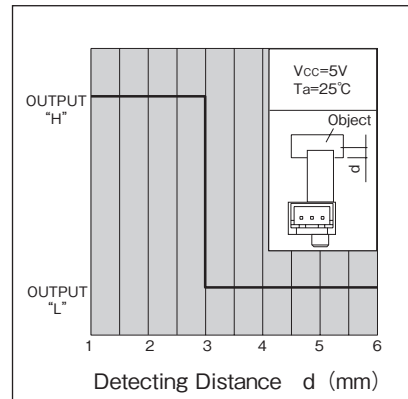

Detecting Position 1 (typ.)
KI1258

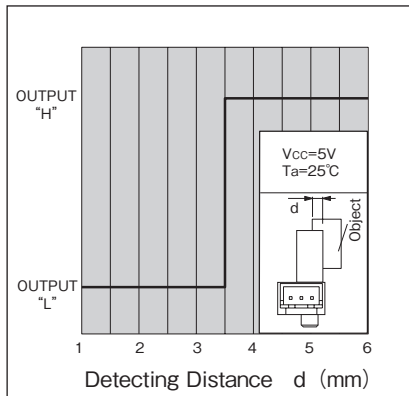

Detecting Position 2 (typ.)
KI1258

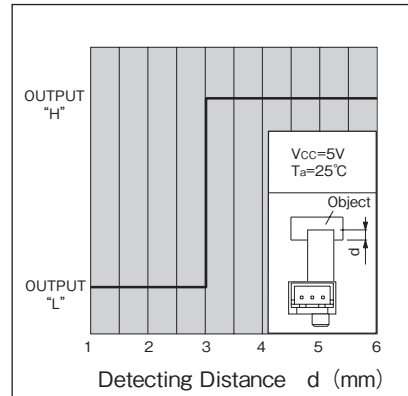

- A Custom designed package is available on request.
- Specification are subject to change without notice.

03.09-1A



Head Office: 3-16-9, Minami-Kamonomiya, Odawara, Kanagawa
 Zip code: 250-0875 Japan
 Tel: +81 -465-45-1212 / Fax: +81 -465-45-1213
 Tokyo Office: 5F, Ebuchi Bld., 3-24-13, Minami-Ohi, Shinagawa,
 Tokyo
 Website: <http://www.shinkoh-elecs.com/>