


Wide Gap Type

04.09-1A


KI1314

Note: Operation never exceeds each value of Absolute Maximum Ratings.


Forward Current vs.
Ambient Temperature

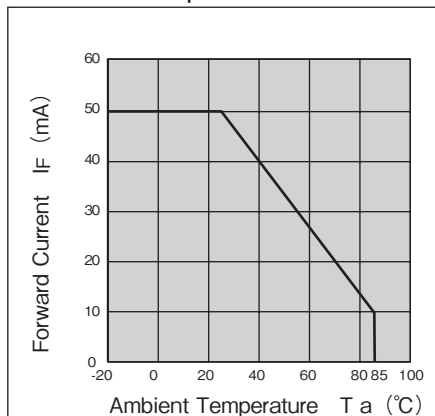


Collector Power Dissipation vs.
Ambient Temperature

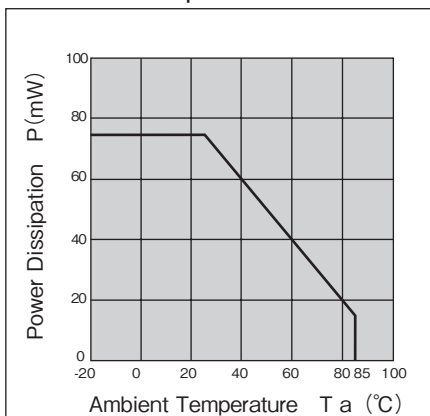


Forward Current vs.
Forward Voltage (typ.)

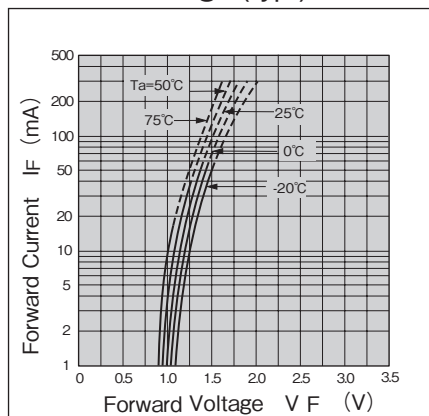


Light Current vs.
Forward Current (typ.)

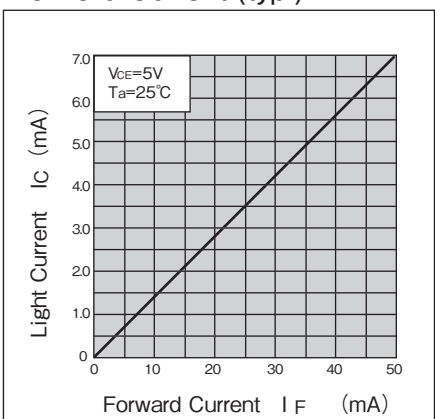


Light Current vs.
Collector-Emitter Voltage (typ.)

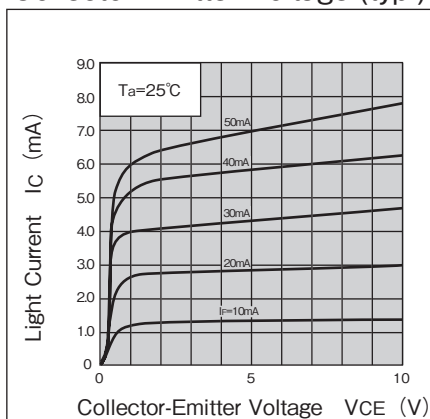


Response Time vs.
Load Resistance (typ.)

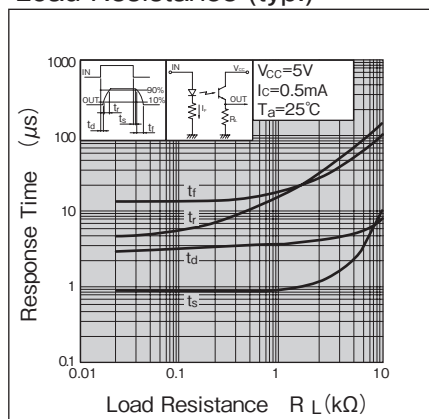


Relative Light Current vs.
Ambient Temperature (typ.)

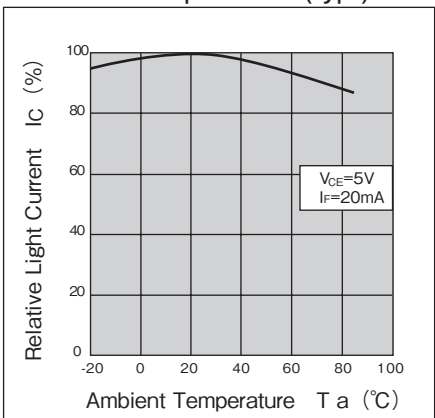

Dark Current vs.
Ambient Temperature (typ.)

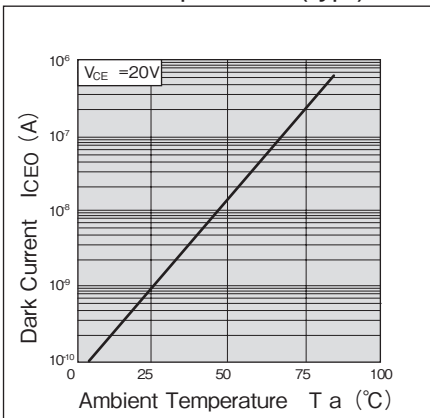

Detecting Position vs.
Relative Light Current (typ.)

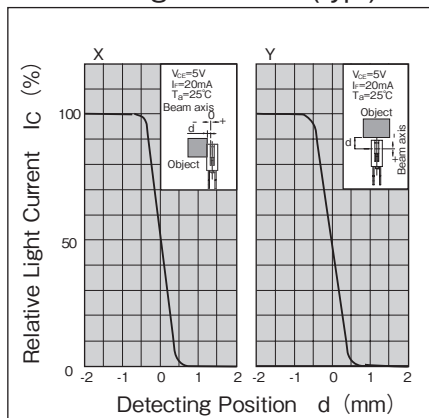

- A Custom designed package is available on request.
- Specification are subject to change without notice.

04.09-1A



Head Office: 3-16-9, Minami-Kamonomiya, Odawara, Kanagawa
 Zip code: 250-0875 Japan
 Tel: +81 -465-45-1212 / Fax: +81 -465-45-1213
 Tokyo Office: 5F, Ebuchi Bldg., 3-24-13, Minami-Ohi, Shinagawa,
 Tokyo
 Website: <http://www.shinkoh-elecs.com/>