

# Photo Reflector

## Tentative

### RGB - C/W Type

# KR1210

## Description

Model **KR1210** series consist of Blue or Green or Red LED and a Photo transistor reflection Photo sensor, and has plastic housing. It is possible to detect high-sensitively by using light's three primary colors.

## Feature

- Blue, Green, Red, Infra Red(IR) LED.
- Compact Package.
- White LED Type.

## Application

- Scanning for Color-discrimination.
- Scanning for Bill Pattern.
- Object detection of Auto Vending Machine.

## Absolute Maximum Ratings


[Ta=25°C Unless otherwise noted]

| Item                    |                           | Symbol           | Rating    |       |     |           | Units |
|-------------------------|---------------------------|------------------|-----------|-------|-----|-----------|-------|
|                         |                           |                  | Blue      | Green | Red | Infra Red |       |
| Emitter                 | Forward Current           | I <sub>F</sub>   | 30        | 30    | 30  | 50        | mA    |
|                         | Pulse Forward Current*1   | I <sub>FP</sub>  | 0.1       | 0.1   | 0.5 | 1         | A     |
|                         | Reverse Voltage           | V <sub>R</sub>   | 5         | 5     | 4   | 5         | V     |
|                         | Power Dissipation         | P                | 120       | 120   | 75  | 150       | mW    |
| Detector                | Collector-Emitter Voltage | V <sub>CEO</sub> | 35        |       |     |           | V     |
|                         | Emitter-Collector Voltage | V <sub>ECO</sub> | 6         |       |     |           | V     |
|                         | Collector Current         | I <sub>C</sub>   | 20        |       |     |           | mA    |
|                         | Power Dissipation         | P <sub>C</sub>   | 50        |       |     |           | mW    |
| Operating Temperature   |                           | T <sub>opr</sub> | -20 ~ +75 |       |     |           | °C    |
| Storage Temperature     |                           | T <sub>stg</sub> | -30 ~ +80 |       |     |           | °C    |
| Soldering Temperature*2 |                           | T <sub>sol</sub> | 260       |       |     |           | °C    |


## Electro-Optical Characteristics [Ta=25°C Unless otherwise noted]

| Item     |                 | Symbol            | Condition ※ 5                               | Blue |      |      | Green |      |      | Red  |      |      | Infra Red |      |      | Units |
|----------|-----------------|-------------------|---------------------------------------------|------|------|------|-------|------|------|------|------|------|-----------|------|------|-------|
|          |                 |                   |                                             | min. | typ. | max. | min.  | typ. | max. | min. | typ. | max. | min.      | typ. | max. |       |
| Emitter  | Forward Voltage | V <sub>F</sub>    | I <sub>F</sub> =20mA                        | —    | 3.6  | 4.0  | —     | 3.5  | 4.0  | —    | 1.85 | 2.5  | —         | 1.2  | 1.5  | V     |
|          | Reverse Current | I <sub>R</sub>    | V <sub>R</sub> =5V (3V)                     | —    | —    | 50   | —     | —    | 50   | —    | —    | 100  | —         | —    | 10   | μA    |
|          | Peak Wavelength | λ <sub>p</sub>    | I <sub>F</sub> =20mA                        | —    | 470  | —    | —     | 525  | —    | —    | 660  | —    | —         | 950  | —    | nm    |
| Detector | Dark Current    | I <sub>CEO</sub>  | V <sub>CE</sub> =20V, 0 lux                 | —    | 200  | —    | —     | 200  | —    | —    | 200  | —    | —         | 200  | —    | nA    |
| Coupled  | Light Current*3 | I <sub>C</sub>    | V <sub>CE</sub> =5V, I <sub>F</sub> =20mA   | 40   | 100  | —    | 40    | 80   | —    | 40   | 150  | —    | 40        | 100  | —    | μA    |
|          | Leak Current*4  | I <sub>LEAK</sub> | V <sub>CE</sub> =5V, I <sub>F</sub> =20mA   | —    | 5    | —    | —     | 5    | —    | —    | 5    | —    | —         | 5    | —    | μA    |
|          | Response Time   | Rise              | V <sub>CC</sub> =5V, I <sub>C</sub> =200 μA | —    | 22   | —    | —     | 24   | —    | —    | 18   | —    | —         | 22   | —    | μsec  |
|          |                 | Fall              | R <sub>L</sub> =1k Ω, d=6.5mm               | —    | 22   | —    | —     | 24   | —    | —    | 18   | —    | —         | 22   | —    | μsec  |

Dimension (Unit:mm)

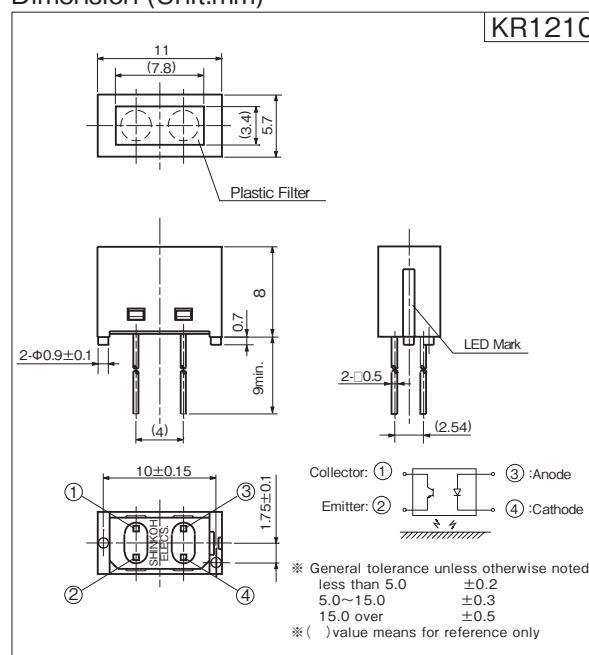

| Item        | Peak Wavelength( λ <sub>p</sub> ) |
|-------------|-----------------------------------|
| KR1210-AA01 | Blue 470nm                        |
| KR1210-AA02 | Green 525nm                       |
| KR1210-AA03 | White —                           |
| KR1210-AA04 | Red 660nm                         |
| KR1210-AA05 | Infra Red 950nm                   |




Solder Area

- ※ 1. Pulse width  $t_w \leq 100 \mu$  sec Duty ratio=0.01
- ※ 2. Soldering condition 5sec. At 1mm over from body.
- ※ 3. 90% Reflective paper d=6.5mm
- ※ 4. No Object, in Dark
- ※ 5. ( ) means values of Red/Infra Red LED.


# KR1210

Note: Operation never exceeds each value of Absolute Maximum Ratings.


Forward Current vs. Ambient Temperature

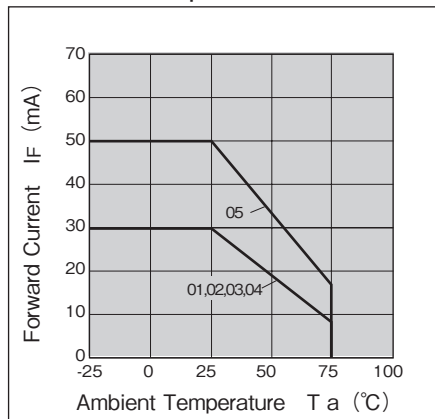


Collector Power Dissipation vs. Ambient Temperature

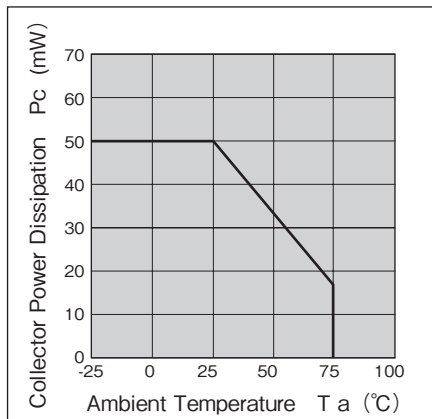


Forward Current vs. Forward Voltage (typ.)

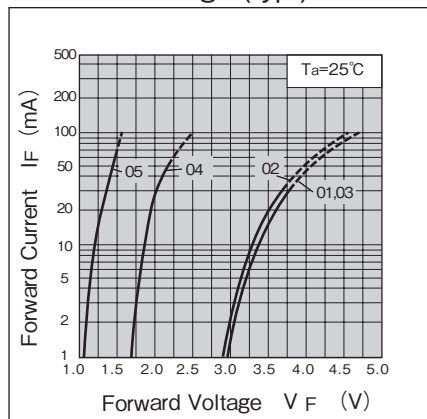


Relative Light Current vs. Ambient Temperature (typ.)

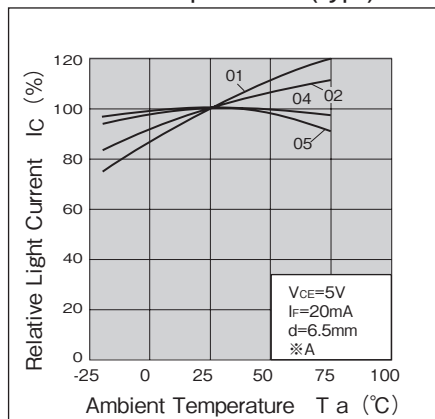


Spectral Wavelength (typ.)

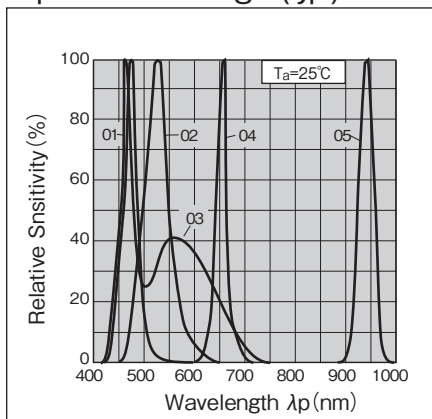


Spectral Response (typ.)

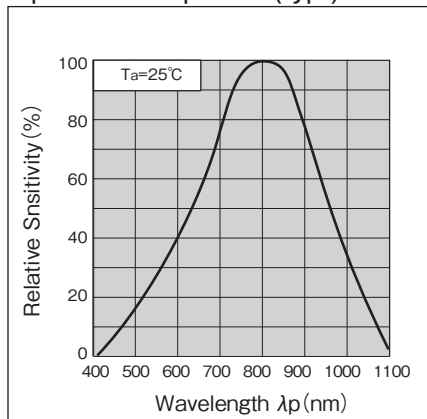

Detecting Position vs. Relative Light Current (typ.)

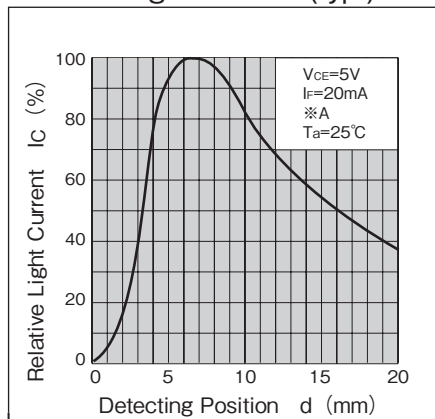

Detecting Position vs. Relative Light Current (typ.)

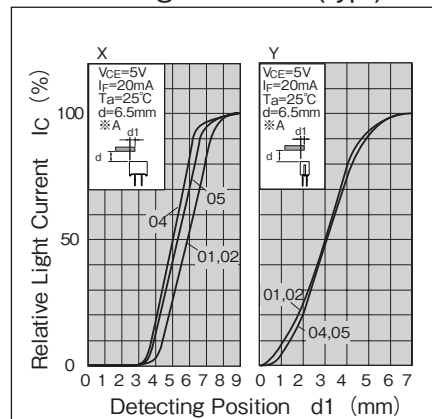

※A 90% Reflective Paper

- A Custom designed package is available on request.
- Specification are subject to change without notice.

04.09-1A



Head Office: 3-16-9, Minami-Kamonomiya, Odawara, Kanagawa  
Zip code: 250-0875 Japan  
Tel: +81 -465-45-1212 / Fax: +81 -465-45-1213  
Tokyo Office: 5F, Ebuchi Bldg., 3-24-13, Minami-Ohi, Shinagawa,  
Tokyo  
Website: <http://www.shinkoh-elecs.com/>