


Light modulation type

04.09-1 A


KR866

Characteristics


Operating Position vs
Detecting Distance 1 (typ.)

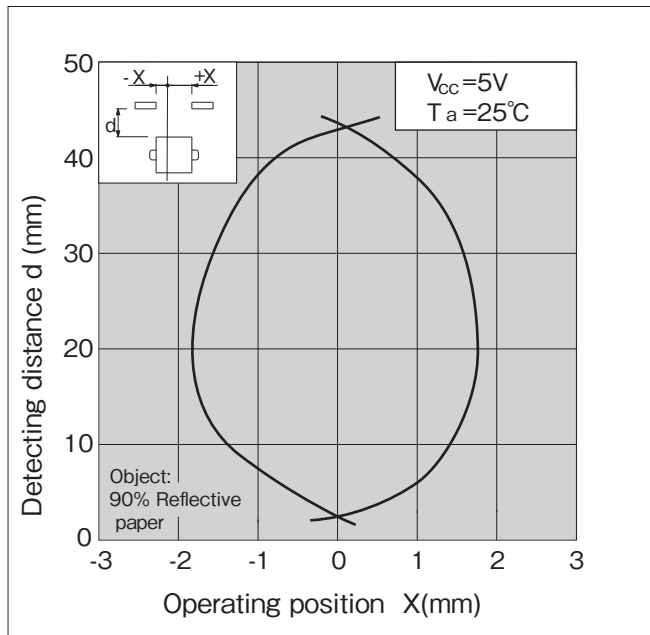

Operating Position vs
Detecting Distance 2 (typ.)

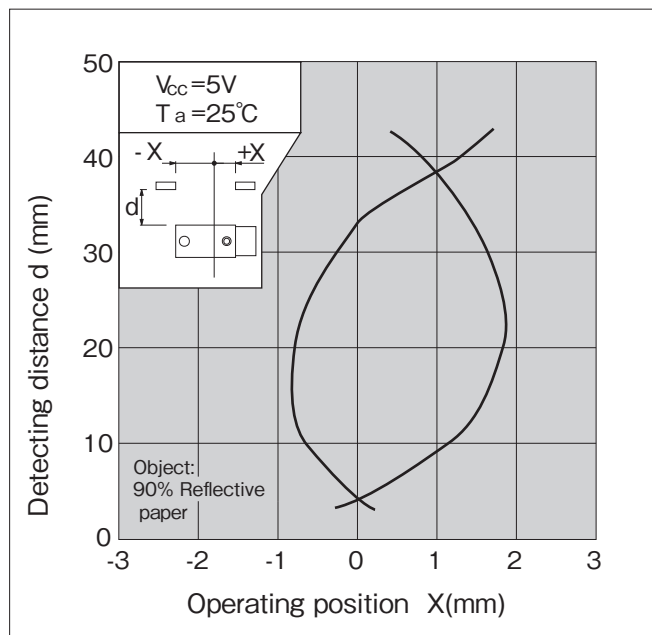

Ambient Temperature vs Detecting Distance (typ.)

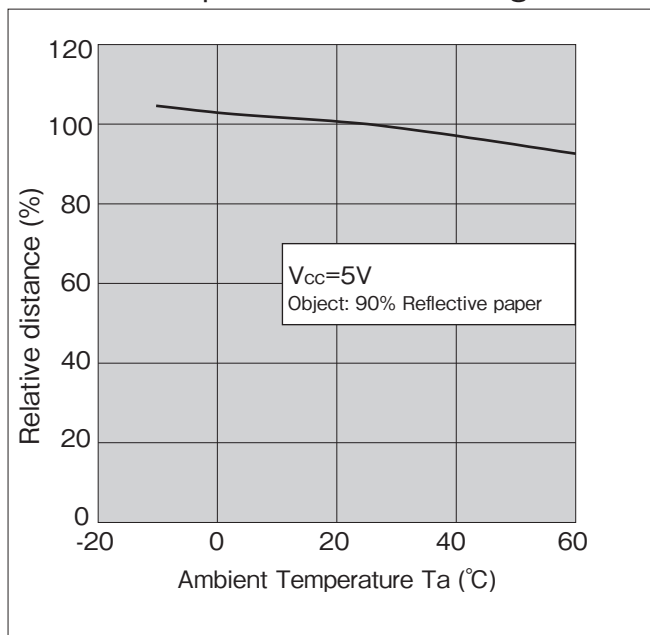

Series Line-Up

(Unit:mm)

Model No.	Method	Detecting Distance			Non-Detecting Distance 90% Reflective paper
		90% Reflective paper	Black Paper OD=1.2	OHP *	
KR865	Light-Modulation	7 ~ 25	13 ~ 17	10 ~ 20	60
KR866		4 ~ 32	10 ~ 20	8 ~ 25	75
KR895		1.5 ~ 7	2.5 ~ 5.5	2 ~ 6	30
KR1207		1 ~ 15	2.5 ~ 4.5	2 ~ 7	55
KR864	Direct Current	7 ~ 11	8 ~ 9	7 ~ 10	30
KR894		2 ~ 5.5	3.5 ~ 4.5	2 ~ 5.5	15

※ Detecting Distance by Black paper and OHP film are reference only.

- A Custom designed package is available on request.
- Specification are subject to change without notice.

04.09-1A



Head Office: 3-16-9, Minami-Kamonomiya, Odawara, Kanagawa
Zip code: 250-0875 Japan
Tel: +81 -465-45-1212 / Fax: +81 -465-45-1213
Tokyo Office: 5F, Ebuchi Bldg., 3-24-13, Minami-Ohi, Shinagawa,
Tokyo
Website: <http://www.shinkoh-elecs.com/>