


Wide Gap Type


KI1305/1306

Note: Operation never exceeds each value of Absolute Maximum Ratings.


Low-level Output Current vs. Ambient Temperature

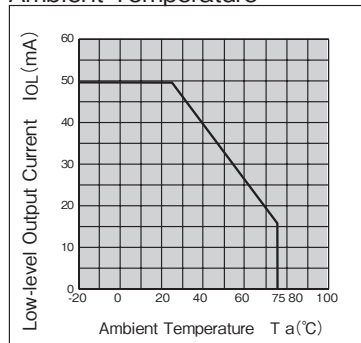


Low-level Output Voltage vs. Low-level Output Current (typ.)

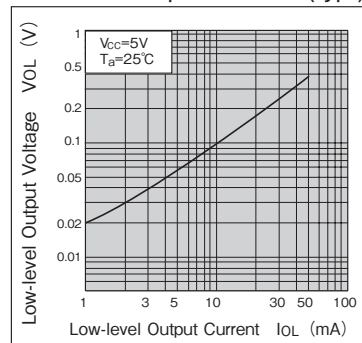


Detecting Position vs. Relative Light Current 1 (typ.) KI1305

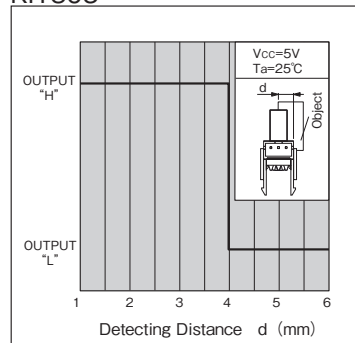


Detecting Position vs. Relative Light Current 2 (typ.) KI1305

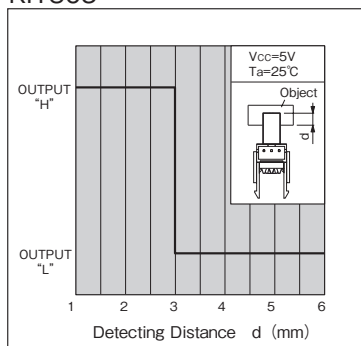


Detecting Position vs. Relative Light Current 1 (typ.) KI1306

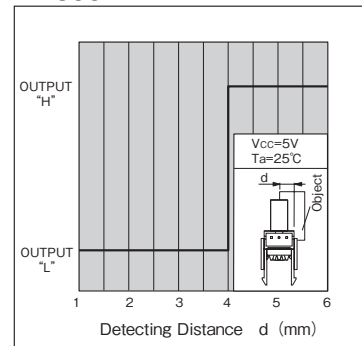

Detecting Position vs. Relative Light Current 2 (typ.) KI1306

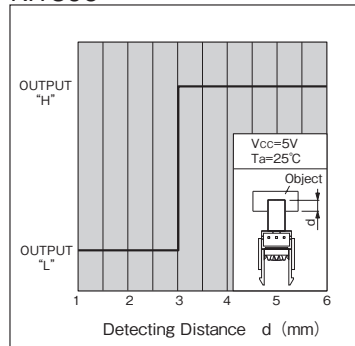

Recommended installation to mounting holes

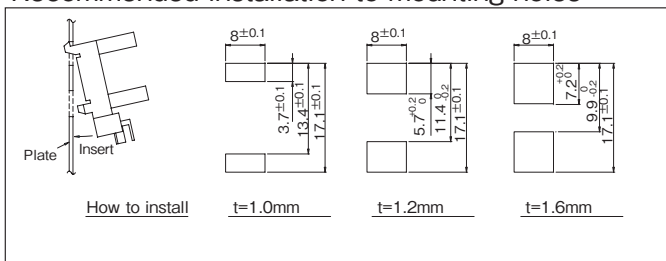

- We recommend to mount the sensor from pressed surface of plate.
- The actual tolerance should be confirmed after setting of sensor

- A Custom designed package is available on request.
- Specification are subject to change without notice.

04.09-1A

shinkoh electronics co., ltd.

Head Office: 3-16-9, Minami-Kamonomiya, Odawara, Kanagawa
 Zip code: 250-0875 Japan
 Tel: +81 -465-45-1212 / Fax: +81 -465-45-1213
 Tokyo Office: 5F, Ebuchi Bldg., 3-24-13, Minami-Ohi, Shinagawa,
 Tokyo
 Website: <http://www.shinkoh-elecs.com/>